

1-way Cassette



Features


Accessories

Plenum box	Air filter	EXV	Drain pump	AC motor	DC motor
/	Standard	Standard	Standard(built-in)	Standard	/




Slim body, easy to install

Has slim body with 250mm height, it is specially suitable for low suspended ceiling rooms.

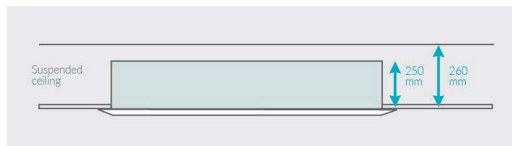

Built-in with drainage pump

Built-in with low noise long life drainage pump, Pumping head is 700mm, flexible for drainage pipe design.

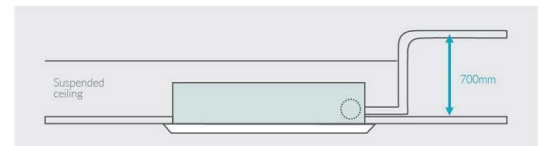

Specification

Model name	Power type	Capacity				Motor input	Air flow		Sound Level	ESP	Dimension(WxHxD)				Body Weight		Connecting pipe			Standard controller
		Cooling		Heating			M ³ /h	CFM			Packing	Body	Panel packing	Panel	Net	Gross	Gas	Liquid	Drain	
		kW	kBtu/h	kW	kBtu/h	kW		DB(A)	Pa	mm	mm	mm	mm	kg	kg	mm	mm	mm		
MCOLD-V22CA/HR1-Q101	50Hz	2.2	7.5	2.5	8.5	0.04	520	306	32~36	/	1160	994	1090	1070	24/3.6	30/5.0	Φ9.53			
MCOLD-V28CA/HR1-Q101	50Hz	2.8	9.5	3.2	10.9						1160	994	1090	1070						
MCOLD-V36CA/HR1-Q101	50Hz	3.6	12.2	4.0	13.6						1160	994	1090	1070						
MCOLD-V45LA/HR1-Q103	50Hz	4.5	15.3	5.0	17.0	0.05	610	360	36~41	/	1160	994	1090	1070	26/3.6	32/5.0	Φ12.7	Φ6.35	ODΦ25	Remote controller
MCOLD-V56CA/HR1-Q103	50Hz	5.6	19.1	6.3	21.4	0.07	750	440	35~41		1470	1304	1390	1380	34/3.6	39/5.0	Φ15.9	Φ9.53		
MCOLD-V71CA/HR1-Q103	50Hz	7.1	24.2	8.0	27.2	0.09	950	550	38~45		1470	1304	1390	1380						

Notes:

- Power supply: 220~240V/1N for 50Hz, the above data is for AC motor model.
- Cooling test condition: indoor side 27°C DB, 19°C WB outdoor side 35°C DB. Heating test condition: indoor side 20°C DB, 15°C WB outdoor side 7°C DB
- Sound level: measured at a point 1.4 m below the unit. During actual operation, these values are normally somewhat higher as a result of ambient conditions.
- The above data may be changed without notice for future improvement on quality and performance.